

# Installation Manual

## GL-LCU/8IP Golmar IP Lift Controller




### Specifications:

- 8 Relay (Floor) outputs – each output is Omron G5LA-14 (10A contacts)
  - Conforms to VDE0435, UL508, CSA22.2, CQC
  - High switching power: 10A 250VAC
  - Withstands impulse of up to 4500V
  - Coil power consumption: 360mW
  - UL class-F insulation type also available
  - Tracking resistance :CTI > 250
  - Contains no lead inside and features
  - Cadmium-free contacts ensuring environment-friendly use
- 100 Base-T Ethernet, PoE
- Unit is configured using Configuration manager PC software  
When the door is unlocked, configured lift level can be enabled and lift can be sent to the configured level .  
For example: If a call came from “parking level -2”, lift controller can be triggered to direct one of the lifts to that level.

# Installation Manual

## GL-LCU/8IP Golmar IP Lift Controller

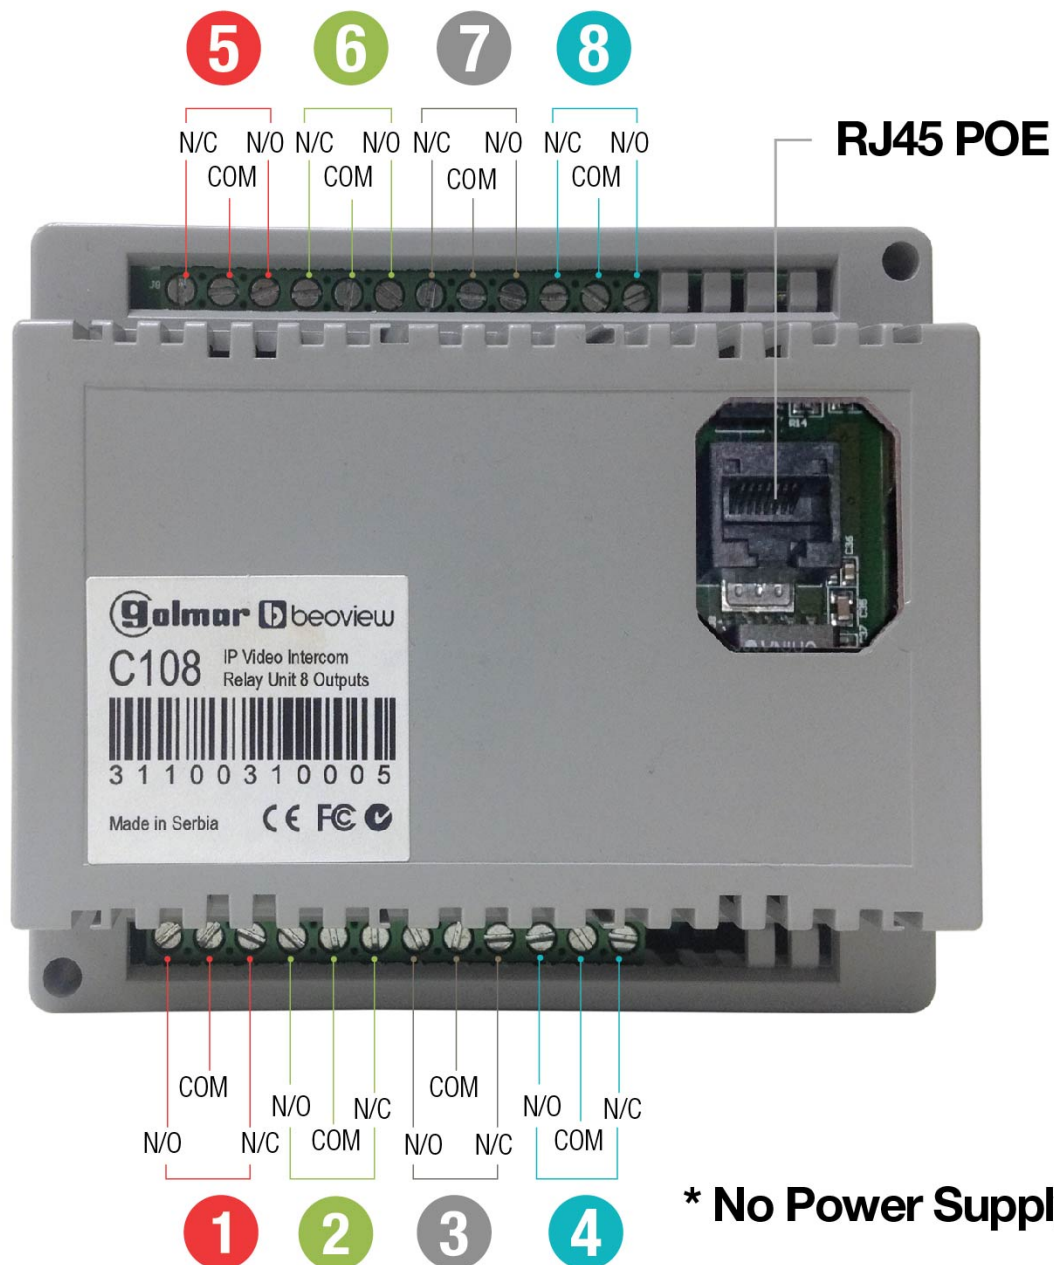

**\* No Power Supply required**